




This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Yeh Chou	2016/08/31	
B				
C				



P1

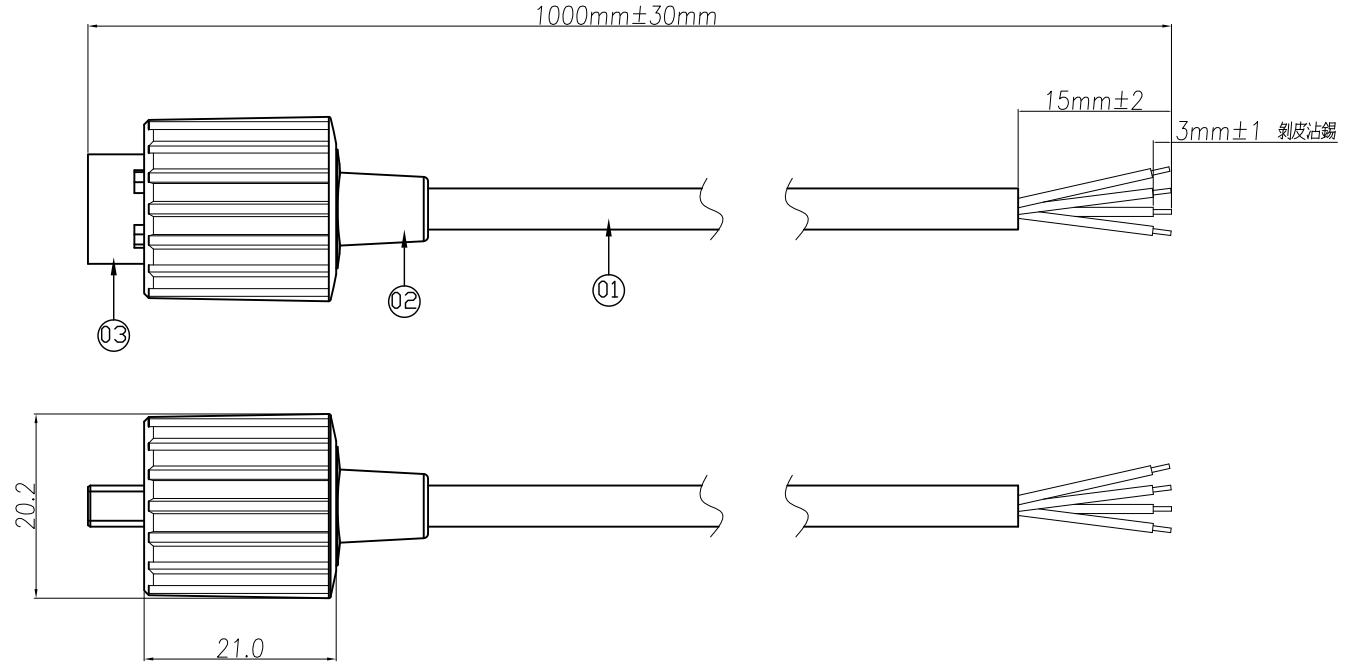

NOTE
ELECTRICIL CHARACTER

1. INSULATION RESISTANCE : 100M ohm(MIN)
2. CONTACT RESISTANCE : 50m ohm(MAX)
3. RATED VOLTAGE : 30V AC
4. RATED CURRENT : 1.5A
5. 100% OPEN & SHORT TESTING

MECHANICAL CHARACTER

1. INSERTION FORCE : 35N
2. EXTRACTION FORCE : 10N

6	RUBBER 2 ; COLOR : BLACK	1
5	RUBBER 1 ; COLOR : BLACK	1
4	RING ; COLOR : BLACK	1
3	USB (M) A TYPE	1
2	SR : PVC 35P ; COLOR : BLACK	1
1	UL2725 28AWG*1P+24AWG*2C OD:4.5	1
ITEM	DESCRIPTION	Q'TY

SHELL	SHIELD	DRAIN WIRE
4	GROUND	BLACK
3	+DATA	GREEN
2	-DATA	WHITE
1	VBUS	RED
P1	SIGNAL NAME	WIRE COLOR
WIRE CONNECTION TABLE		

DRAWN	Yeh Chou	APP'D	Ku Chou	UNIT	mm	TOLERANCE	NIAN YEONG ENTERPRISE 年永實業有限公司		TITLE	Waterproof USB CABLE L=1M			SHEET
CHK'D	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.15 .xxx ±0.10 .xxxx ±0.05 ANGULA ±1°			PART NO.	CB-0571-11	DWG NO.	QC7579	VERSION A