


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

| REV. | DESCRIPTION | APPROVED BY | DATE | ECN NO. |
|------|-------------|-------------|-----------|---------|
| | 增加電器特性 | Frank | 21/01/08' | |
| | RELEASE | Fido Weng | 24/08/09' | |
| | | | | |

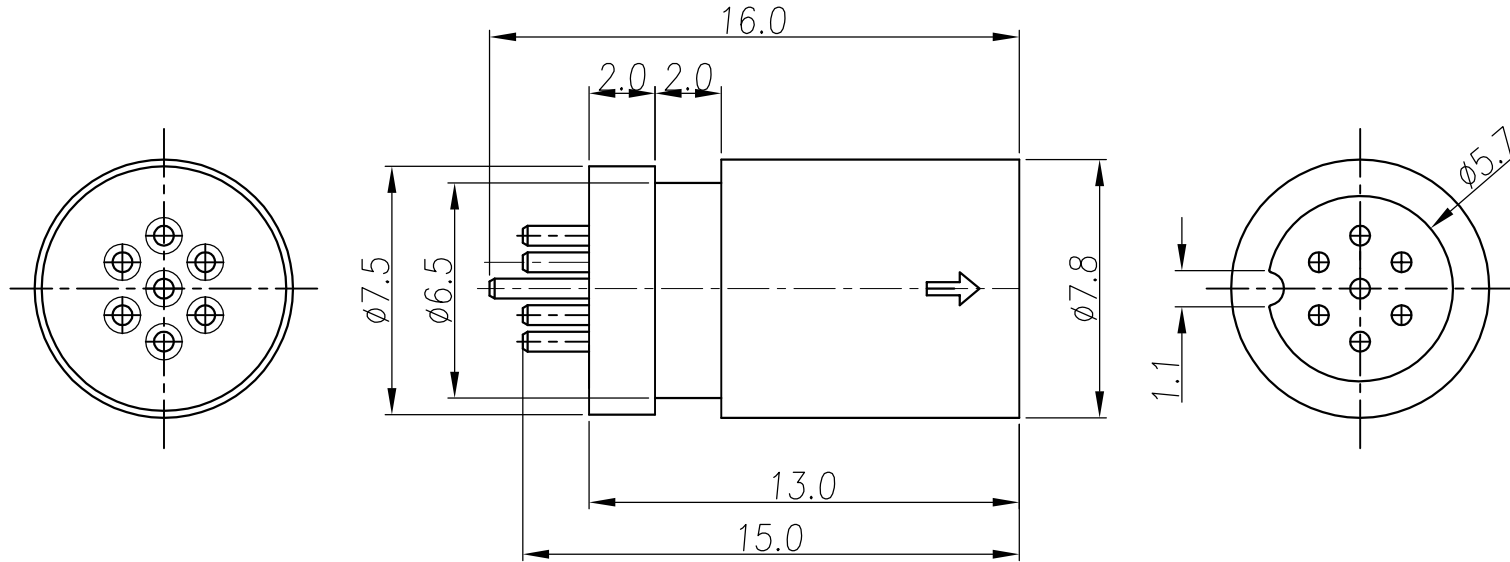

備註/NOTE:

- 1.MATERIAL:
 - 1-1.膠殼/HOUSING: PBT. COLOR:SEE TABLE A
 - 1-2.針/PIN: 黃銅/BRASS.
- 2.PLATING:
 - 2-1.針/PIN: 銀 30u"/SILVER 30u".
- 3.Specification:
 - 3-1.Current rating:1A AC/DC Min.
 - 3-2.Voltage rating:30V AC/DC Min.
 - 3-3.Contact resistance:30Mohm Max.
 - 3-4.Insulation resistance:100Mohm Min.
 - 3-5.Dielectric Withstanding voltage:500V AC/ 1 minute.

TABLE A

| | |
|-------------|-------------|
| SPD-07M1-01 | 特7PIN (M) 黑 |
| SPD-07M1-02 | 特7PIN (M) 綠 |
| P/N | DESCRIPTION |

| DRAWN | 繪圖 | APP'D | UNIT | mm | TOLERANCE | TITLE | | SHEET | | |
|--|------------|-----------|-------|-----|--|-----------|---------|---------|--------|--------------|
| CHK'D | Emily Suen | Fido Weng | SCALE | 1:1 | .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1° | 特7PIN (M) | | | | |
| NIAN YEONG ENTERPRISE 年永實業有限公司 | | | | | | PART NO. | TABLE A | DWG NO. | QC1363 | VERSION D |