

This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	22/10/13*	
B				
C				

1. MATERIAL :
- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK.
- 1-2. CONTACT : BRASS.
- 1-3. NUT : BRASS
- 1-4. SHELL : BRASS
- 1-5. O-RING : EPDM ; COLOR : BLACK.
2. FINISH :
- 2-1. CONTACT : SEE TABLE A
- UNDER PLATE : NICKEL
- 2-2. NUT : NICKEL PLATED
- 2-3. SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 1.5A
- 3-2. Rated Voltage : 30V
- 3-3. Water proof: IP67
4. Environmental :
- 4-1. Operation Temperature : -40℃~85℃



TABLE A

WP-12M2-07-11 WP-12M2-45-11	WP-12M2-32-11 WP-12M2-46-11


WP-12M2-46-11	GOLD FLASH PLATED
WP-12M2-45-11	GOLD FLASH PLATED
WP-12M2-32-11	10u" GOLD PLATED
WP-12M2-07-11	10u" GOLD PLATED
PART No.	FINISH



Pin Assignments
Front View

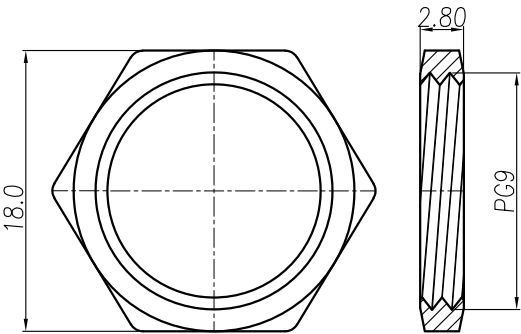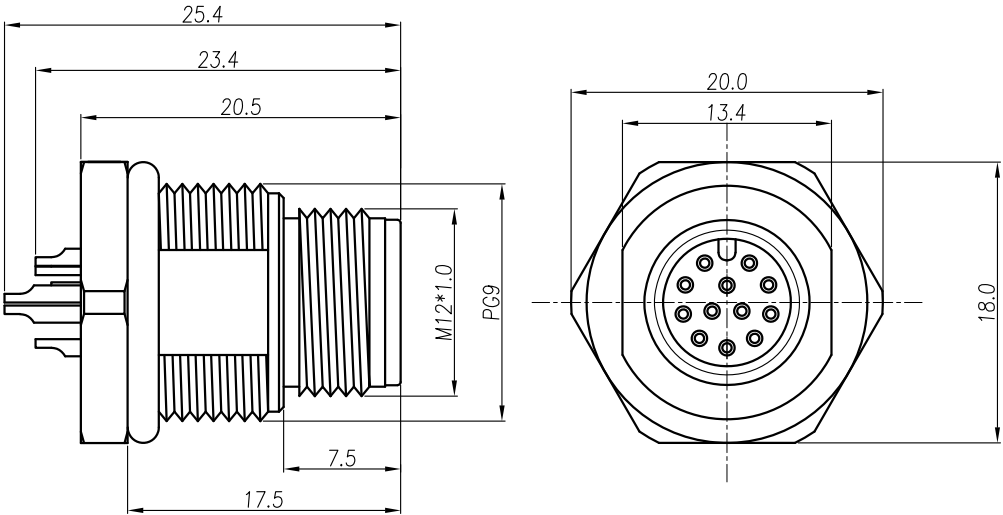

NUT

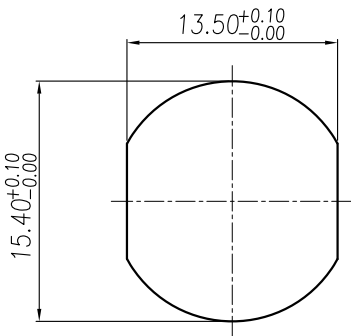

RECOMMEND PANEL CUT-OUT

DRAWN	Ting	APPEND	Fido Weng	UNIT	mm	TOLERANCE			NIAN YEONG ENTERPRISE 年永實業有限公司	TITLE	M12 12PIN(M) 插端PG9 屏格式(洗雙端/無滿槽/螺母雙側角)			SHEET
CHOKED	Emily Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°				PART NO.	SEE TABLE A	DWG NO.	QC7376	VERSION A