

This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.




CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	PRELIMINARY RELEASE	Ku Chou	10/05/23*	
B				
C				


Table A

5 Way(4+PE)	4 Way(3+PE)	3 Way(2+PE)

WP-03M2-168-11	GOLD FLASH PLATED
WP-04M2-297-11	GOLD FLASH PLATED
WP-05M2-261-11	GOLD FLASH PLATED
WP-03M2-169-11	10u" GOLD PLATED
WP-04M2-298-11	10u" GOLD PLATED
WP-05M2-215-11	10u" GOLD PLATED
PART No.	FINISH

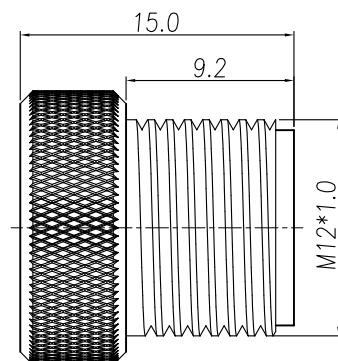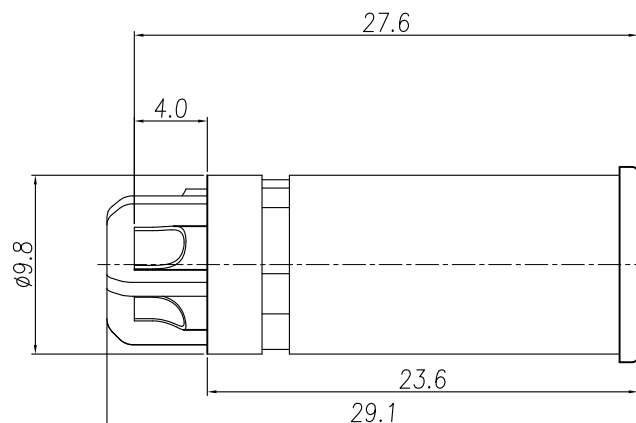

NUT



- MATERIAL :
 - HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - NUT : BRASS
- FINISH :
 - CONTACT : SEE TABLE A
 - NUT : NICKEL PLATED
- ELECTRICAL SPECIFICATION :
 - RATED CURRENT: 12A
 - RATED VOLTAGE : 630V
 - WATER PROOF: IP67
- ENVIRONMENTAL :
 - OPERATION TEMPERATURE : -40℃~85℃

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE				TITLE	WP M12(M) K-CODING MOLDED WITH CABLE	SHEET
CHK'D	Ku Chou			SCALE	1:1	ANGULAR	±1°			PART NO.	SEE TABLE A	VERSION
										DWG NO.	QC10714	A