
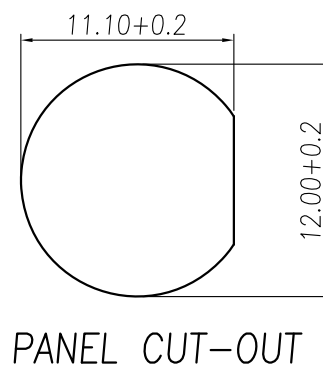
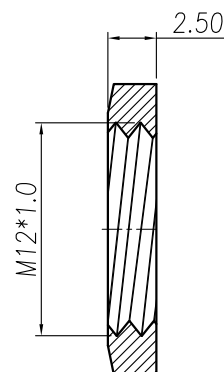
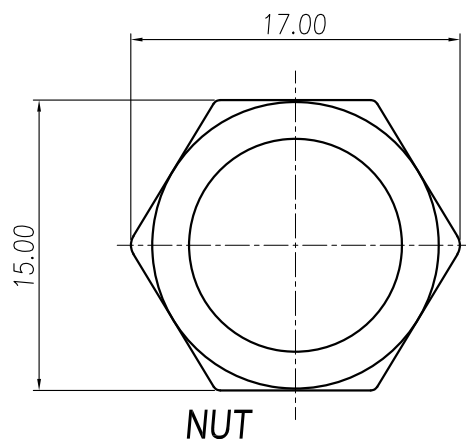
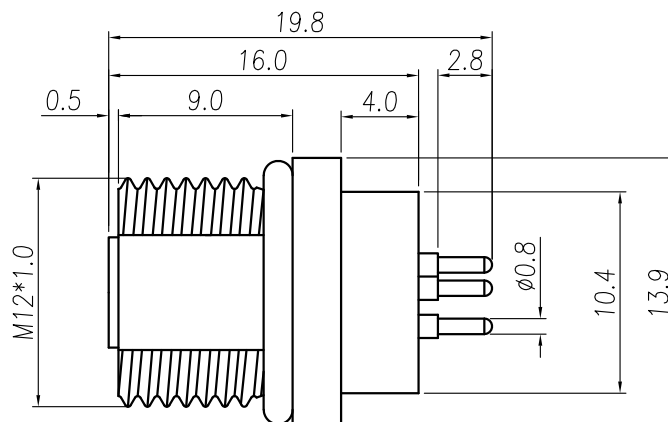



This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Fido Weng	31/03/16*	
B				
C				

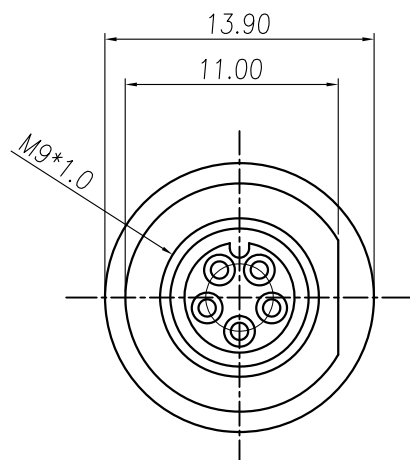

PANEL CUT-OUT

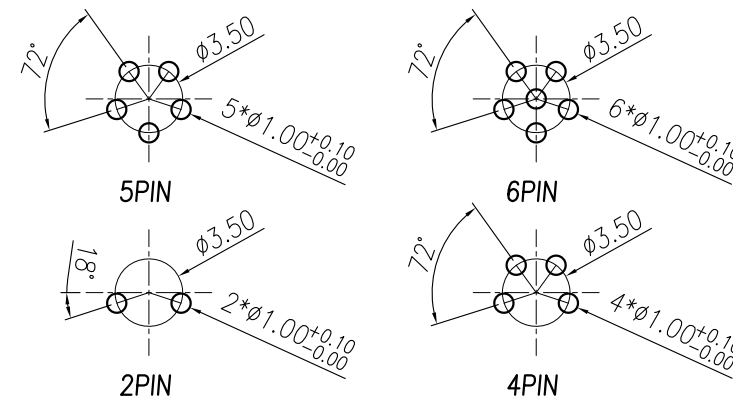

RECOMMEND P.C.B LAYOUT

- MATERIAL :
 - HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - O-RING A : NBR ; COLOR : BLACK
 - O-RING B : EPDM ; COLOR : BLACK
 - NUT : BRASS
 - SHELL : BRASS
- FINISH :
 - CONTACT : 10u" GOLD PLATED
UNDER PLATE : NICKEL
 - NUT : NICKEL PLATED .
 - SHELL : NICKEL PLATED .
- ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Rated Voltage : 60V
 - Water proof : IP67
- Environmental :
 - Operation Temperature : -20℃~85℃

TABLE A

2PIN	4PIN	5PIN	6PIN
WP-02F3-10-11	WP-04F3-30-11	WP-05F3-01-11	WP-06F3-11-11

DRAWN	KU	APP'D	UNIT	mm	TOLERANCE		TITLE	防水頭 M9 (F) 板端前鎖DIP式	SHEET
CHK'D			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		PART NO.	SEE TABLE A	VERSION
							DWG NO.	QC7644	A



NIAN YEONG ENTERPRISE
年永實業有限公司