
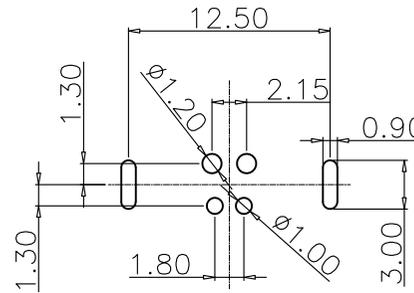
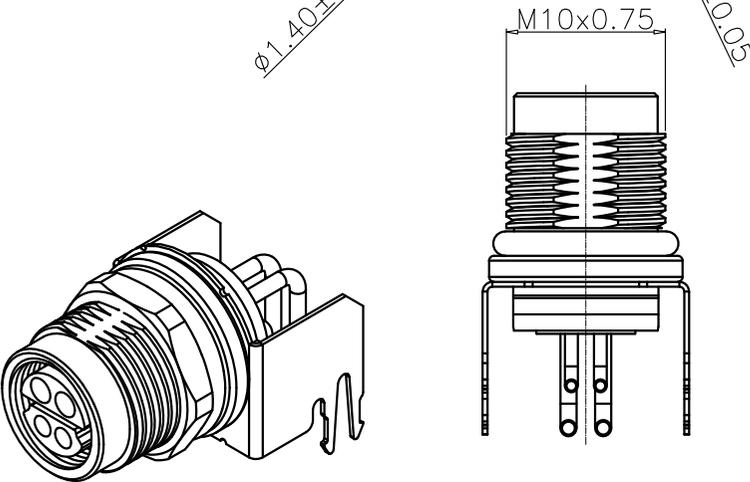


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	22/04/25'	
B				
C				

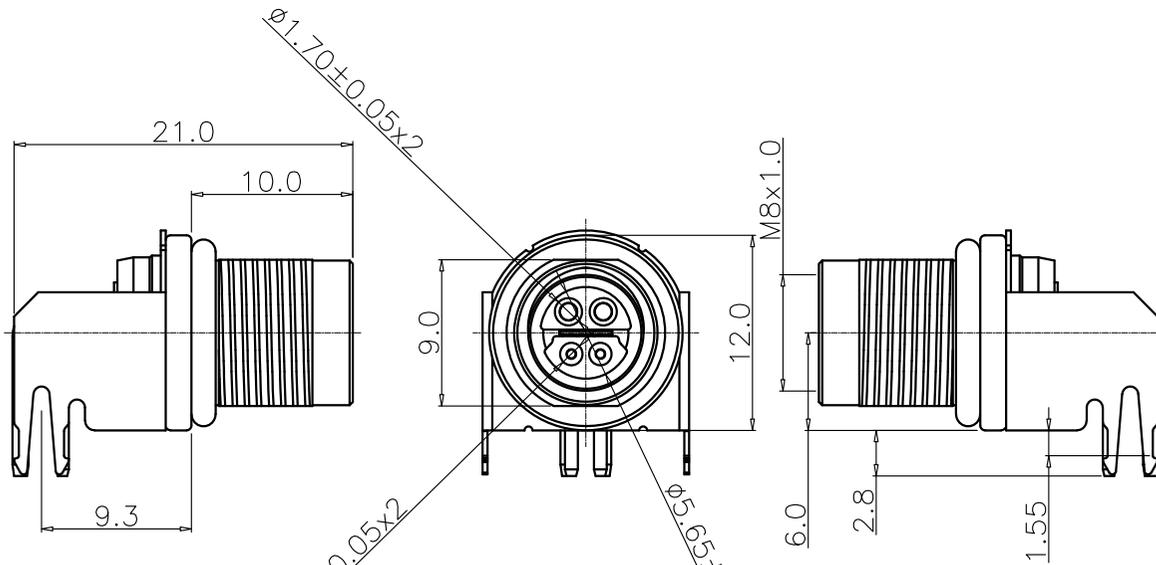

- MATERIAL :
 - HOUSING : LCP UL94V-0 ; COLOR : BLACK
 - CONTACT : BRASS
 - SHELL : BRASS
 - SHIELD : PHOSPHOR BRONZE
 - GROUND : PHOSPHOR BRONZE
 - NUT : BRASS
 - O-RING A : SILICONE
 - O-RING B : SILICONE
- FINISH :
 - CONTACT : 30u" MIN. GOLD PLATED
 - SHELL : NICKEL PLATING
 - SHIELD : NICKEL PLATING
 - GROUND : NICKEL PLATING
 - NUT : NICKEL PLATING
- ELECTRICAL SPECIFICATION :
 - RATED CURRENT: DATA 1.5A ; POWER 4A
 - RATED VOLTAGE : 60V
 - WATER PROOF: IP67
(CONNECTORS IN MATED AND LOCKED POSITION.)
- ENVIRONMENTAL :
 - OPERATION TEMPERATURE : -40°C~85°C
- CONNECTOR ACCORDING TO : IEC63171-6

DRAWN	Emily Suen	APP'D	Ku Chou	UNIT	mm	TOLERANCE		TITLE	WP M8(F) SPE 4PIN Front Lock PCB 90° Type			SHEET
CHK'D	Ku Chou			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°		PART NO.	WP-04F3-36-11	DWG NO.	QC11376	VERSION